

# ULTRALAYMENT PREMIUM


## OFB U-LAY PANELS

### PRODUCT KNOWLEDGE

We couldn't make it look any different than particleboard however; our ULTRALAYMENT PREMIUM OFB U-LAY Panels are manufactured with Selected Hardwoods. Fortifying the high performance binders, with a very advanced highly moisture resistant compound, results in the panels having approximately 30% higher resistance to moisture than that of standard PBU underlayments. The panels are produced to a higher density, approximately 46-pounds/cubic foot with a minimum of 30% better strength properties than that of standard floor underlayments. ULTRALAYMENT PREMIUM OFB U-LAY Panels offer high impact resistance, providing added structural strength and stability while covering minor irregularities in the old or new floor. The solid, homogeneous 1/4" (6.0mm) and 3/8" (8.0mm) construction combination of long-grain and micro-wood fibers is layered orientated from bottom to the top. The void free core provides added holding power for mechanical fasteners. This panel provides the flooring mechanic with much less preparation work before any floor covering is applied. The end result is one of the highest quality flooring panels on the market today. 25 Year Transferable Warranty

#### **Features & Benefits:**

- One of the most economical panels on the market today with great benefits & value.
- High quality selected Hardwood fibers for added physical properties.
- Indentation Resistant – we orientate long grain hardwood core fibers and micro fibers on the surface.
- Wax levels greater than typical particleboard underlay to ensure superior moisture resistance?
- High quality fortified binders with a highly moisture resistant compound and EdgeSealed edges for greater moisture resistance.
- Greater dimensional stability, less linear variation, less edge thickness swell than other u-lays.
- Super Smooth and blemish free surface with a moisture block back.
- Density +/- 46 # per cubic foot average
- Sanding tolerance +/- .004" also ensures fine surface nap.
- Nailing grid for speed and accuracy **SCORE & SNAP**
- Meets all the vinyl manufacturers' requirements
- Environmentally Friendly Product

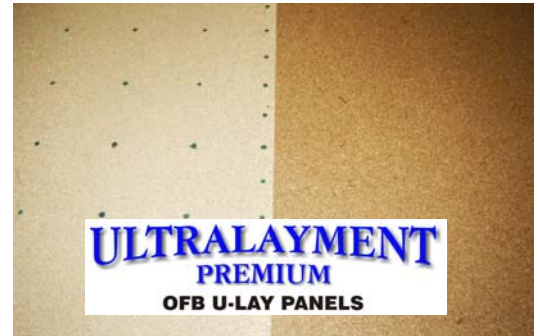

#### **When to recommend:**

- For all floor coverings where protection from indentation is critical and sub floor enhancement is required
- For structural purposes to reduce deflection and vibration in the floor system where acoustical value is needed
- As an economical panel with added values to old and new floors
- As a renovation panel directly over solid old flooring
- Light commercial applications
- For all floor-covering products i.e. vinyl, carpeting, laminated flooring, hardwood flooring and ceramic tiles

Available in 1/4" (6.0mm) 3/8" (8.0mm) 4' x 4', 4' x 5', 4' x 6' and 4' x 8' **for professional builder and installer**

**NOT FOR:** gang showers, saunas, hot tub decks or directly over concrete

**Note:** For use under ceramic tile, follow the installation and associated product recommendations of the Tile Council of America (TCA) - The Terrazzo, Tile and Marble Association of Canada (TTMAC) and FLORCORE's recommended installation instructions for FLORCORE OFB Enviro-Green Underlayment Panels and ceramics.

[www.argofineimport.com](http://www.argofineimport.com) 06-17-08 rjk

